



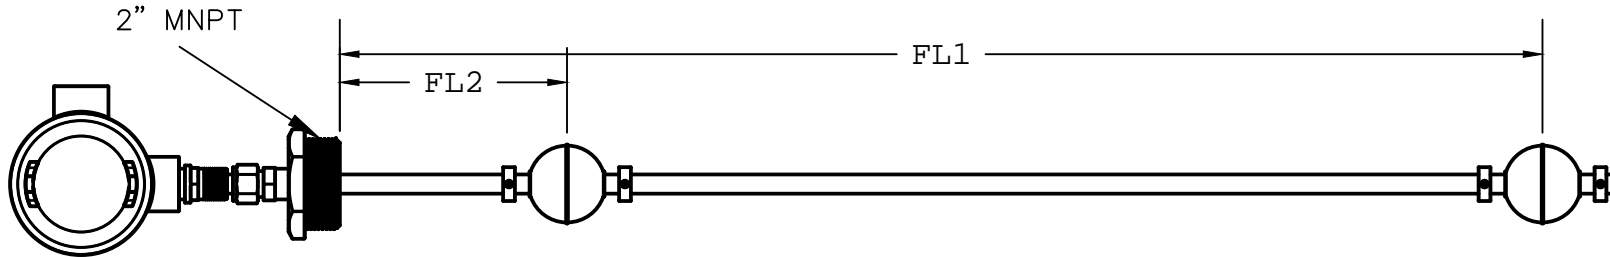

OVERFILL PROTECTION DEVICE
MH61303
CAN/ULC00661-10

Class I Division 1 and 2, Groups A,B,C,D,T5

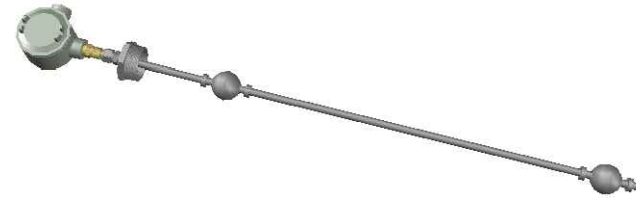

HOUSING: Nema 4X, Explosion Proof, Class 1, Div 1, Group C & D

MAXIMUM PRESSURE: 150 PSI

OPERATING TEMPERATURE: -20F ~ 250F

FLOAT MATERIAL: Stainless Steel

Switch Certified To:

CAN/CSA STD. C22.2 NO. 1010-1

CAN/CSA STD. C22.2 NO. 30

Conforms To:

UL1203 & ANSI/ISA S82-03

FLOAT LEVEL	FL1	FL2	ALBANY PUMP CO. LTD.	
FUNCTION	LOW LEVEL ALARM	HIGH LEVEL ALARM		
HEIGHT FROM BOTTOM OF TANK (% OF TANK DEPTH)	%	%	SCALE NONE	FUEL OIL ACCESSORIES
NORMALLY OPEN (NO)/ NORMALLY CLOSED (NC)	NC	NC	CHK'D	
WIRE COLOUR	GREEN	RED	This drawing and the information depicted therein is the property of Albany Pump Co. Ltd. Copies are issued in strict confidence and shall not be reproduced, copied or used as the basis for the manufacture or sale of products without prior written permission of Albany Pump Co.	