

Albany Pump Company Ltd.

@!-+\$.GYf]Yg.
\$!, ; DA # \$!+) DG-
#(BDH


I h]`]hm' 8 i hm' ; YUf'D i a dg

The L970 series Utility Gear Pump is a close tolerance, low flow, high pressure positive displacement pump. It's compact close coupled design, and quiet running helical gears, make this an economic, yet premium quality pump.

5DD@=75H-CBG`.

- o Excess Pressure Pump
- o Liquid Transfer / Circulation
- o Small Booster Jockey Pump
- o Spray Nozzles / Misting
- o Hydraulic / Hydrostatic

Flow : 0 - 8.2 GPM ● 0 - 0.31 L/s ● 0 - 1.86 m³/hr
Pressure : 0 - 75 PSI ● 5.25 Bar ● 0 - 173 Ft.

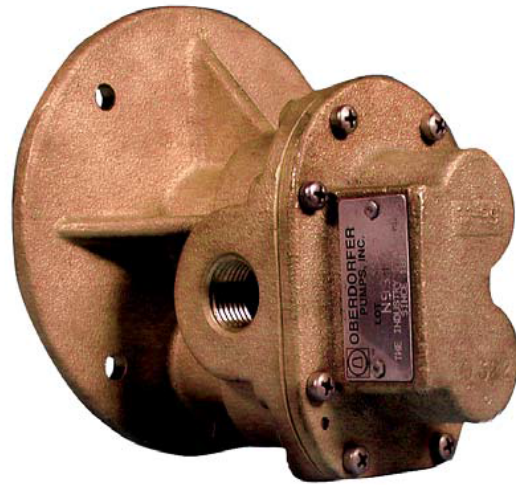

:YU h i f Yg`.

- Precision Spur Style Gears
- Self Priming due to close manufacturing tolerances.
- Suction lift of up to 20 feet
- Pump housings are of bronze. Shafts are of stainless steel.
- Lip seals of Buna or Viton.
- Carbon graphite shaft bearings.
- Bearings never need lubrication.
- Easy maintenance and service

FchU h]cb`.

Standard rotation has the pump discharge on the right (facing the pump end). Standard Motors are uni-directional, so to change the rotation on the pumps simply loosen the bolt that holds the pump-end to the motor, and rotate the pump 180° so the discharge is on the left.

AU]bhYbUbWY`.

To ensure a long life to this pump a strainer is always recommended in front of the pump inlet.

GdYW]Z]WU h]cbg`.

%+&) FDA				
DG-	; DA	<D' FYe'	<D' Achcf	Achcf :fUa Y
O	19.80	0.80	1	56C
20	19.30	1.00	1	56C
40	19.00	1.35	1 1/2	145TC
60	18.70	1.75	2	145TC
80	18.40	2.20	3	182TC
100	18.00	2.65	3	182TC
125*	17.70	3.00	3	182TC
150*	17.40	3.60	5	184TC

8] a Ybg]cbg`.

