

HEAVY DUTY R-SERIES GEAR PUMPS


The R series Heavy Gear Pumps are a close tolerance, medium flow, high pressure positive displacement pump. A standard in the industry since 1906.

APPLICATIONS

- Oil Transfer Pump
- Liquid Transfer/Circulation
- Small Booster Jockey Pump
- Spray Nozzles/Misting
- Hydraulic/Hydrostatic

FLOW: 0-263 GPM | 0-16.6 L/s | 0-59.7 m³/hr

PRESSURE: 0-250 PSI | 10.5 Bar | 0-346 Ft.

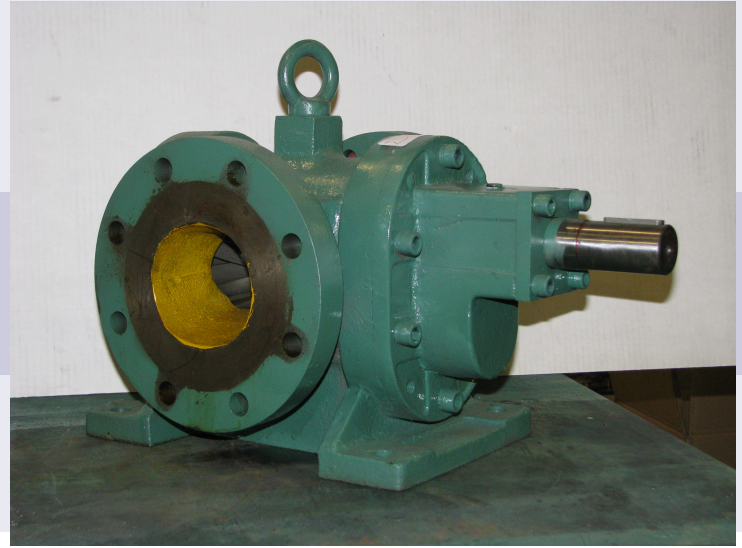

FEATURES

- Precision Spur Style Gears
- Self Priming due to close manufacturing tolerances
- Suction lift of up to 25 feet
- Pump housings are of Cast Iron
- Pump shafts are of stainless steel
- Mechanical seals of Buna or Viton
- Carbon graphite shaft bearings
- Bearings never need lubrication
- Easy maintenance and service

SPECIFICATIONS

PORTS	4" NPT / 102 mm
CAPACITY	263.0 USGPM / 3.97 L/s (Max.)
PRESSURE	250 PSI / 10.5 Bar (Max.)
INLET PRESSURE	50 PSI / 3.5 Bar (Max.)
TEMPERATURE	225° F (100°C) (Buna Seal)

ROTATION

Standard rotation has the pump discharge on the right (facing the pump end). Standard Motors are uni-directional, so to change the rotation on the pumps simply loosen the bolt that holds the pump-end to the motor, and rotate the pump 180° so the discharge is on the left.


MAINTENANCE

To ensure a long life to this pump a strainer is always recommended in front of the pump inlet.

PERFORMANCE

SPEED	US GPM
1760 RPM	263
1150 RPM	170
880 RPM	124

DIMENSIONS

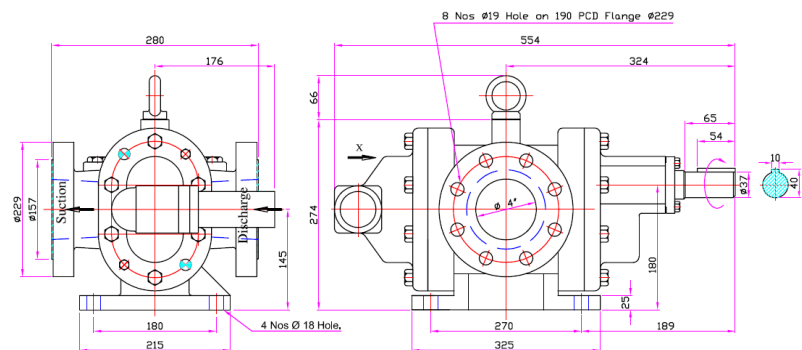

since 1906
albany
pump company Ltd.

PHONE: (888) 334-3348 | FAX: (888) 335-3391 | WEB: WWW.ALBANYPUMP.COM | EMAIL: SALES@ALBANYPUMP.COM